AMITEK

sales@amiteksmarthomes.com | www.amiteksmarthomes.com

Regd. Office: 148, Kasturba Nagar, Gautam Marg, Nirman Nagar, Jaipur, Rajasthan.
Corporate Office: **Amitek Tower**,14/120, Shipra Path, Mansarovar, Jaipur 302 020
Contact us: Jaipur 95290 55558/93142 11222/93528 50707/93513 04254/93522 54008
Udaipur 93524 40001, Ajmer 93513 04254, Bhilwara 93522 40366, Bhopal 77710 05011
eMail: sales@amiteksmarthomes.com | website: www.amiteksmarthomes.com

Restrict Unwanted Entry in your Premises by
Amitek Smart Digital Locks

AMITEK

sales@amiteksmarthomes.com | www.amiteksmarthomes.com

ADL12002

Induction card password series

Product tooling sketch

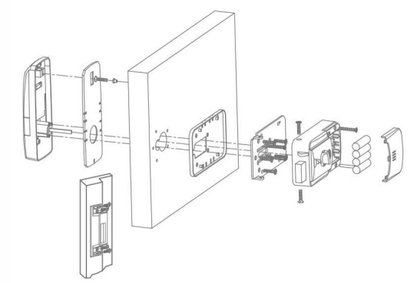

Product appearance sketch

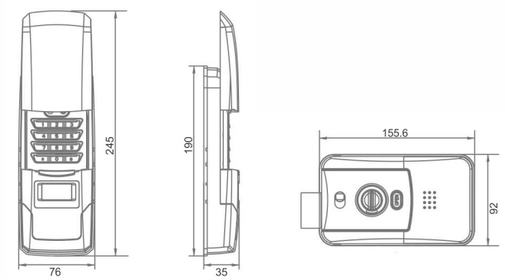

Product function

- **Card function**
- Low electricity reminding function
- Information updating function
- Anti-peeping password function
- False lock warning function
- ✶ Please refer to the function icon instruction for other optional functions.

Product specification

Exterior lock body size	L:190xW:76xH:34 (mm)	Use occasions	Housing, office building etc
Interior lock body size	L:156xW:92xH:52 (mm)	Applicable door type	Wooden door, metal door
Applicable door thickness	40-55mm (adjustable)	Operating voltage	DC6V(4x1.5V battery), DC9V reserving power
Key capacity	Card (or password) 98; password 2	Unlock methods	Intelligent card, password, Remote Compatible with any Standard Home Automation System.
Material	Alum Alloy		

ADL12004

Wooden door lock fingerprint password

ADL12004

Fingerprint and Password Glass Door Lock

Product function

- **Card function**
- Fingerprint identification function
- Information updating function
- Anti-peeping password function
- False lock warning function
- Low electricity reminding function
- ✶ Please refer to the function icon instruction for other optional functions.

Product specification

Exterior lock body size	L:192xW:76xH:37 (mm)
Interior lock body size	L:192xW:76xH:37 (mm)
Use occasions	Restaurants & other residential buildings
Applicable door type	Wooden door, metal door
Applicable door thickness	40-55mm (adjustable)
Key capacity	Card (or password)70; fingerprint 162
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power
Unlock methods	Intelligent card, fingerprint, password, Remote, Compatible with any Standard Home Automation System.
Material	Alum Alloy

Product specification

Exterior lock body size	L:192xW:76xH:37 (mm)
Interior lock body size	L:192xW:76xH:37 (mm)
Use occasions	Restaurants & other residential buildings
Applicable door type	Double glass door, single glass door
Applicable door thickness	Glass door: 12-15mm
Key capacity	Card (or password)70; fingerprint 162
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power
Unlock methods	Intelligent card, fingerprint, password, Remote, Compatible with any Standard Home Automation System.
Material	Alum Alloy

ADL12006

fingerprint + password series



Product tooling sketch



Product appearance sketch

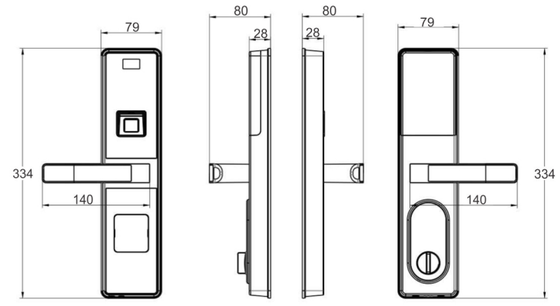

Product function

- **Card function**
- Fingerprint identification function
- Information updating function
- Anti-peeping password function
- False lock warning function
- Low electricity reminding function
- ✶ Please refer to the function icon instruction for other optional functions.

Product specification

Exterior lock body size	L:334xW:79xH:80 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:334xW:79xH:80 (mm)	Emergency power	Equipped with emergency power interface & 6~9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating temperature	-20°C~55°C
Applicable door thickness	40-100mm (adjustable)	Operating humidity	≤93%
Key capacity	Capacity for card, password, fingerprint and remote control is over all 100	Unlock methods	Fingerprint, Card, password, Remote, Mechanical keys, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power	Material	Alum Alloy

ADL12008

fingerprint + password series

Product tooling sketch

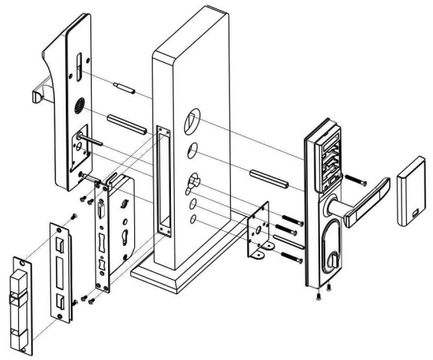

Product appearance sketch

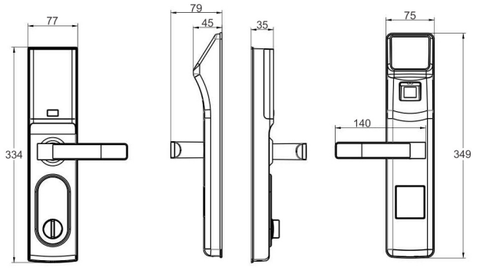

Product function

Card function	Fingerprint identification function	Information updating function	Anti-peeping password function
False lock warning function	Low electricity reminding function	★ Please refer to the function icon instruction for other optional functions.	

Product specification

Exterior lock body size	L:349xW:75xH:79 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:334xW:77xH:69 (mm)	Emergency power	Equipped with emergency power interface & 6~9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating temperature	-20°C~55°C
Applicable door thickness	40-100mm (adjustable)	Operating humidity	≤93%
Key capacity	Card (or password)70; finger-print 162	Unlock methods	Intelligent card, fingerprint, password, mec-hanical keys, Remote, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power	Material	Zinc Alloy

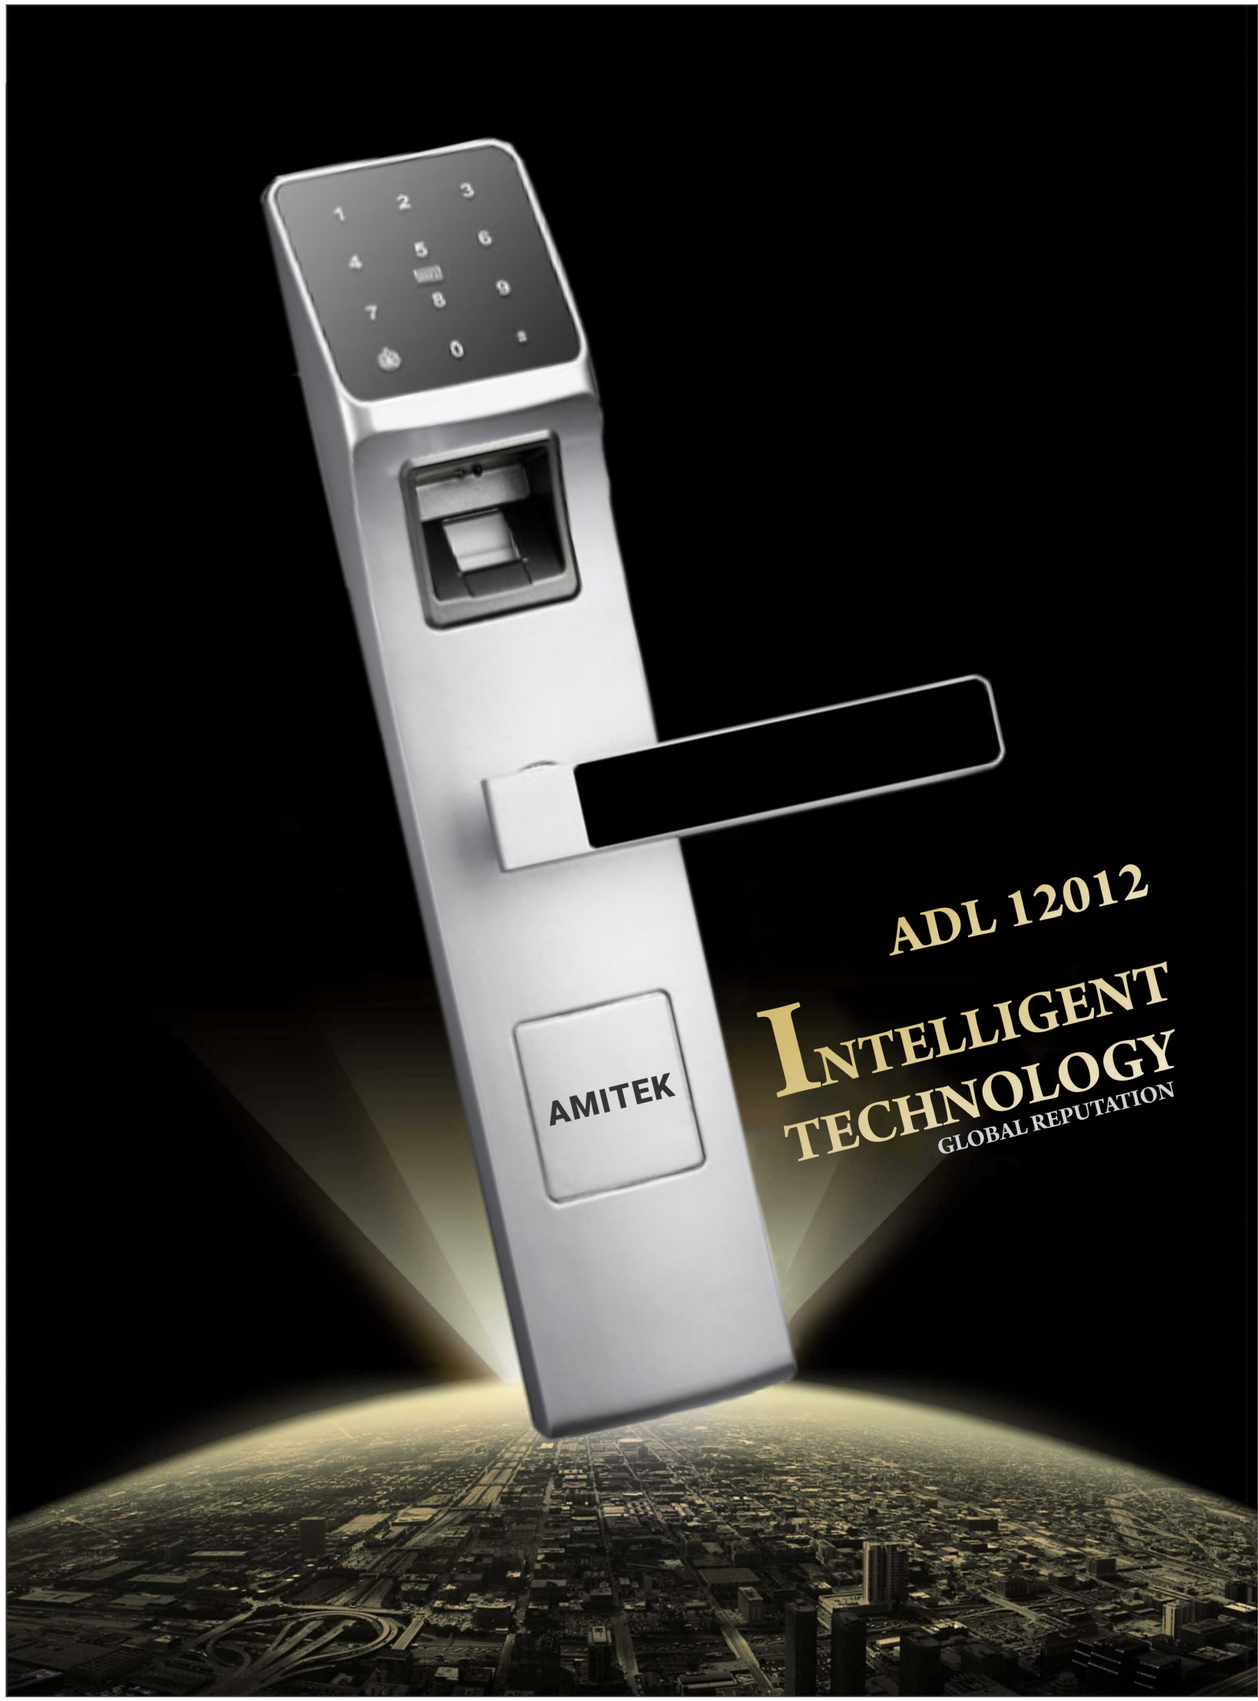

ADL12012

fingerprint + password series



Product tooling sketch



Product appearance sketch

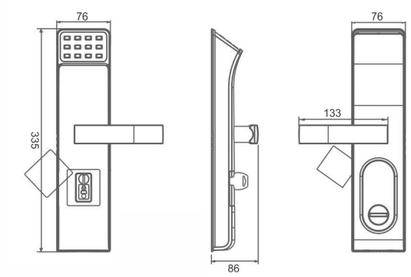

Product function

- **Card function**
- Fingerprint identification function
- Information updating function
- Anti-peeping password function
- False lock warning function
- Low electricity reminding function
- ★ Please refer to the function icon instruction for other optional functions.

Product specification

Exterior lock body size	L:335xW:76xH:86 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:225xW:76xH:86 (mm)	Emergency power	Equipped with emergency power interface & 6~9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating temperature	-20˚C~55˚C
Applicable door thickness	40-100mm (adjustable)	Operating humidity	≤93%
Key capacity	Card (or password)70; fingerprint 162	Unlock methods	Intelligent card, fingerprint, password, mechanical keys, Remote, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power	Material	Zinc Alloy

Rear lock body Flower lock body

Housing lock core Hotel lock core

Product tooling sketch



Product appearance sketch

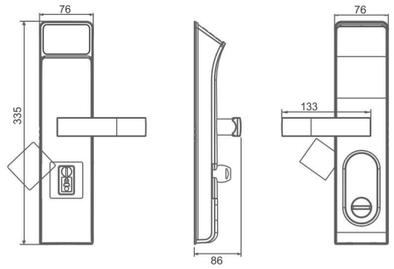

Product function

Card function	Facial recognition	Information updating function	Anti-peeping password function
False lock warning function	Low electricity reminding function	WIFI background operation function	

Product specification

Exterior lock body size	L:335xW:76xH:86 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:325xW:76xH:86 (mm)	Emergency power	Equipped with emergency power interface & 6~9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating temperature	-20˚C~55˚C
Applicable door thickness	40-55mm (adjustable)	Operating humidity	≤93%
Key capacity	Face : 10; card or password 50	Unlock methods	Facial, password, mechanical keys, card, Remote,Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5Vbattery), DC9V reserving power	Available colors	

Induction card password series

Fingerprint+password series

Rear lock body

Product tooling sketch

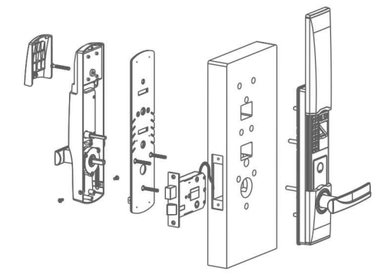

Lock core (optional)

Product appearance sketch

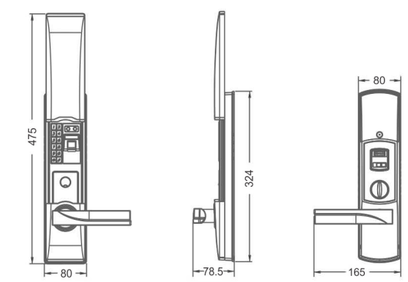

Product function

- **Card function**
- Fingerprint identification function
- Information updating function
- Anti-peeping password function
- False lock warning function
- Low electricity reminding function
- ✶ Please refer to the function icon instruction for other optional functions.

Product specification

Exterior lock body size	L:324xW:80xH:78.5 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:324xW:80xH:78 (mm)	Emergency power	Equipped with emergency power interface and 6 ~ 9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating tempreature	-20˚C ~ 55˚C
Applicable door thickness	40-55mm (adjustable)	Operating humidity	≤93%
Key capacity	Card (or password) 70; password 162	Unlock methods	Intelligent card, fingerprint, password, mechanical keys, Remote, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5Vbattery), DC9V reserving power	Available colors	

Hotel sensor card+ password series

Fingerprint+password series

Rear lock body

Housing lock core

Hotel lock core

Product tooling sketch



Product appearance sketch

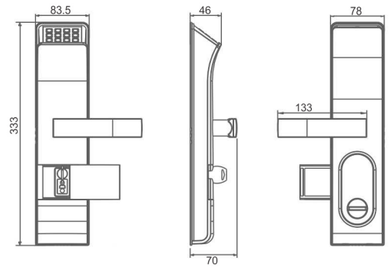

Product function

Card function	Fingerprint identification function	Information updating function	Anti-peeping password function
False lock warning function	Low electricity reminding function	✶ Please refer to the function icon instruction for other optional functions.	

Product specification

Exterior lock body size	L:333xW:83.5xH:70 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:303xW:78xH:70 (mm)	Emergency power	Equipped with emergency power interface & 6~9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating temperature	-20˚C~55˚C
Applicable door thickness	40-55mm (adjustable)	Operating humidity	≤93%
Key capacity	Card (or password)70; finger-print 162	Unlock methods	Intelligent card, fingerprint, password, mec-hanical keys, Remote, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power	Available colors	

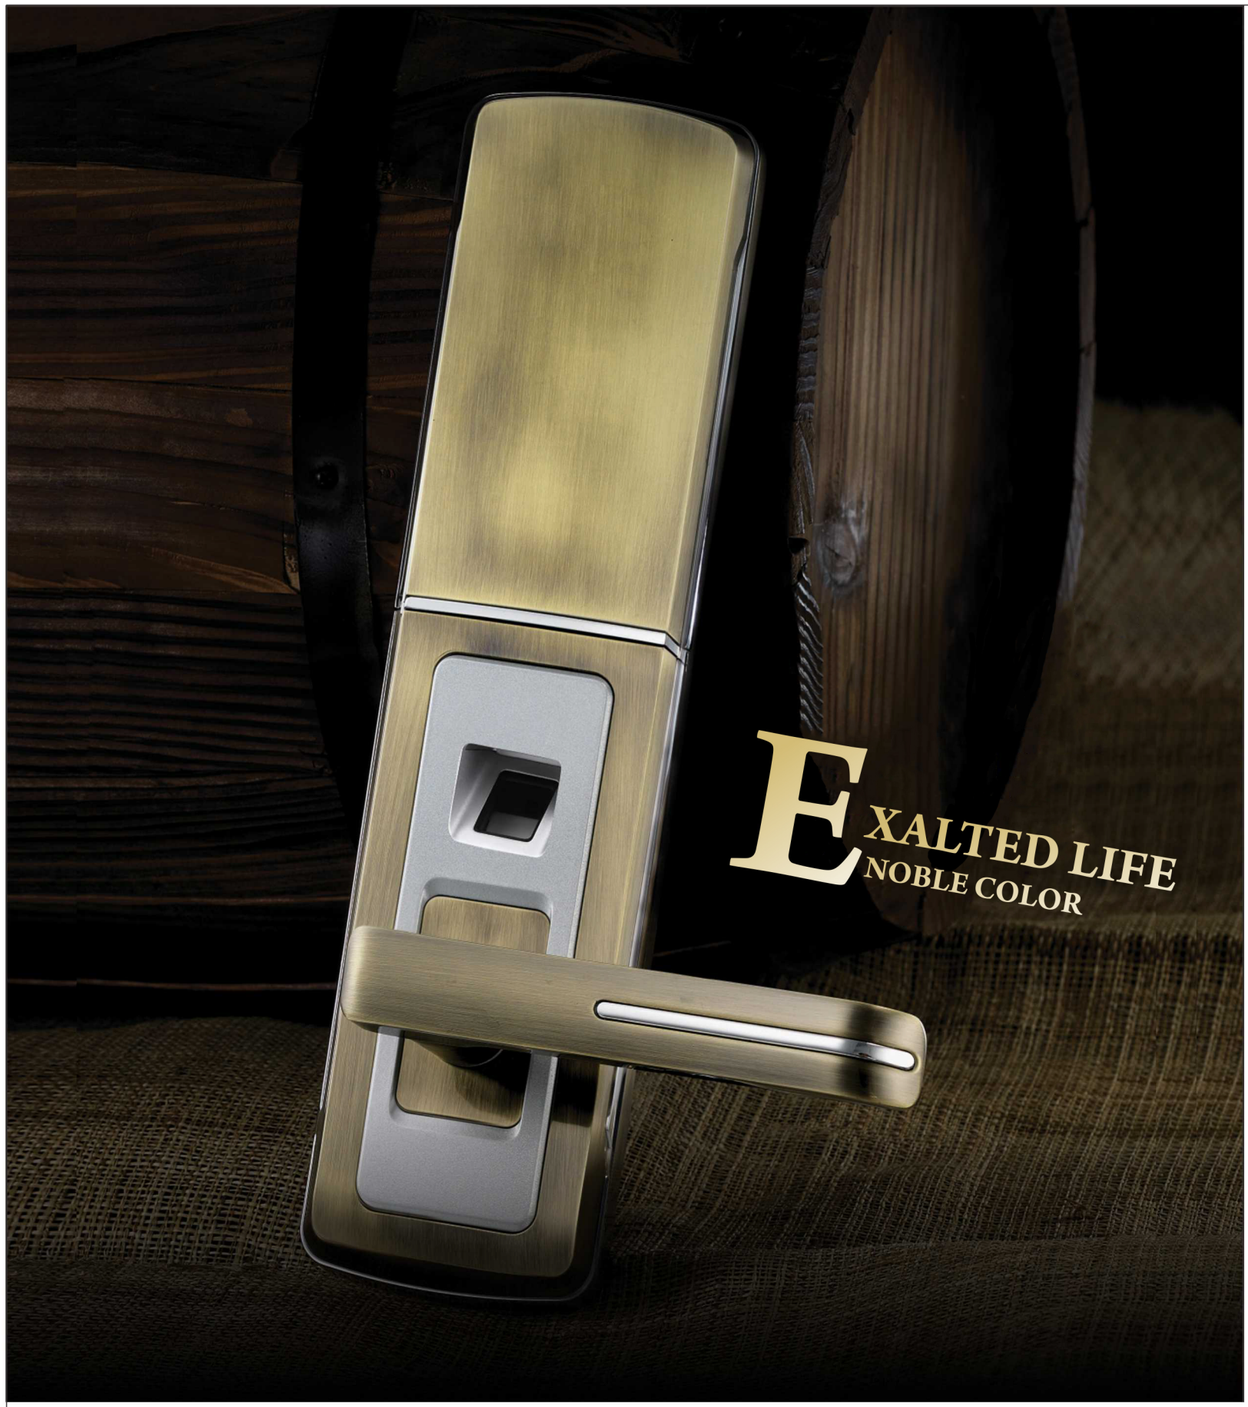

Fingerprint+password series

Sensorcard+password series

Rear lock body



Lock core (optional)

Product tooling sketch

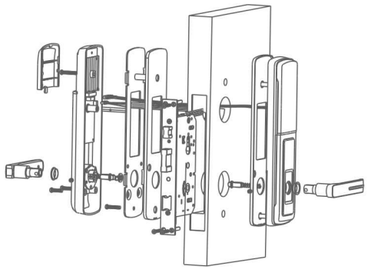

Product appearance sketch

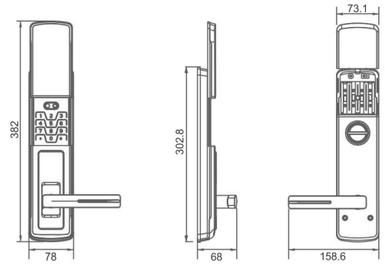

Product function

- **Card function**
- Fingerprint identification function
- Information updating function
- Anti-peeping password function
- False lock warning function
- Low electricity reminding function
- ✶ Please refer to the function icon instruction for other optional functions.

Product specification

Exterior lock body size	L:303xW:78xH:65 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:303xW:78xH:67 (mm)	Emergency power	Equipped with emergency power interface and 6 ~ 9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating tempreature	-20°C ~ 55°C
Applicable door thickness	40-55mm (adjustable)	Operating humidity	≤93%
Key capacity	Card (or password) 70; password 162	Unlock methods	Intelligent card, fingerprint, password, mechanical keys, Remote, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power	Available colors	

Rear lock body Flower lock body

Housing lock core Hotel lock core

Product tooling sketch



Product appearance sketch

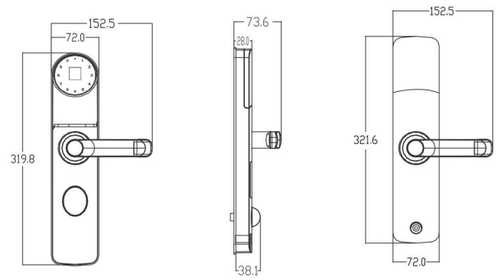

Product function

Card function	Fingerprint identification function	Information updating function	Anti-peeping password function
False lock warning function	Low electricity reminding function	✶ Please refer to the function icon instruction for other optional functions.	

Product specification

Exterior lock body size	L:319.8xW:72xH:71.6 (mm)	Operating voltage range	4.0~6.0 V
Interior lock body size	L:321.6xW:72xH:73.6 (mm)	Emergency power	Equipped with emergency power interface & 6~9V voltage
Use occasions	Hotel, housing, office building etc	Idle mode current	≤30UA
Applicable door type	Wooden door, metal door	Operating temperature	-20˚C~55˚C
Applicable door thickness	40-55mm (adjustable)	Operating humidity	≤93%
Key capacity	Card (or password)70; fingerprint 162	Unlock methods	Intelligent card, fingerprint, password, mechanical keys, Remote, Compatible with any Standard Home Automation System.
Operating voltage	DC6V(4x1.5V battery), DC9V reserving power	Available colors	